




Versatile Structures

VALMEX® FR 580

# Lightweight – strong – versatile

## Available Colours

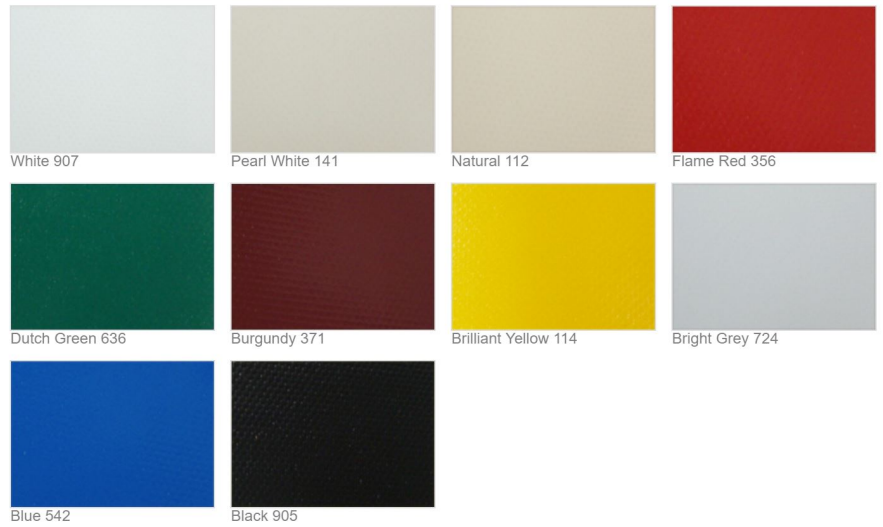

## VALMEX® FR 580

Coating	PVC
Finish	PVDF lacquer on top side, fungicide, low-wick
Weight	580 g/m <sup>2</sup>
Tensile strength (warp/weft)	2900/2700 N/50mm
Tear strength (warp/weft)	300/300 N
Adhesion	16 N/cm
Cold resistance	-30 °C
Heat resistance	+70 °C
Light fastness	>6 Note
Crack resistance	@100000 x
Width	250 cm

Different widths and several colours available on request



Our commitment to environmental responsibility and sustainability

